

# S10 NON-METALLIC PUMP TECHNICAL DATA SHEET

## SERIES

### STANDARD DUTY BALL VALVE PUMPS

Offering the widest range of performance and application capabilities

## PERFORMANCE

### SUCTION / DISCHARGE PORT SIZE

- 1" ANSI Flange

### CAPACITY

- 0 to 23 gallons per minute  
(0 to 87 liters per minute)

### AIR DISTRIBUTION VALVE

- No-lube, no-stall design

### SOLIDS-HANDLING

- Up to .15 in. (4 mm)

### HEADS UP TO

- 100 psi or 231 ft. of water  
(7 bar or 70 meters)

### MAXIMUM OPERATING PRESSURE


- 100 psi (7 bar)

### DISPLACEMENT/STROKE


- .26 Gallon / .098 liter

### WEIGHTS

- PVDF 23 lbs. (10kg)
- Polypropylene 19 lbs. (9kg)
- Nylon 20 lbs. (9kg)

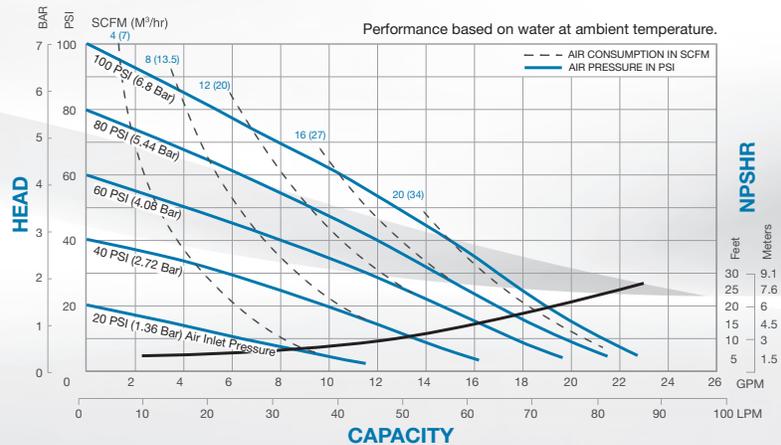

## DIMENSIONS

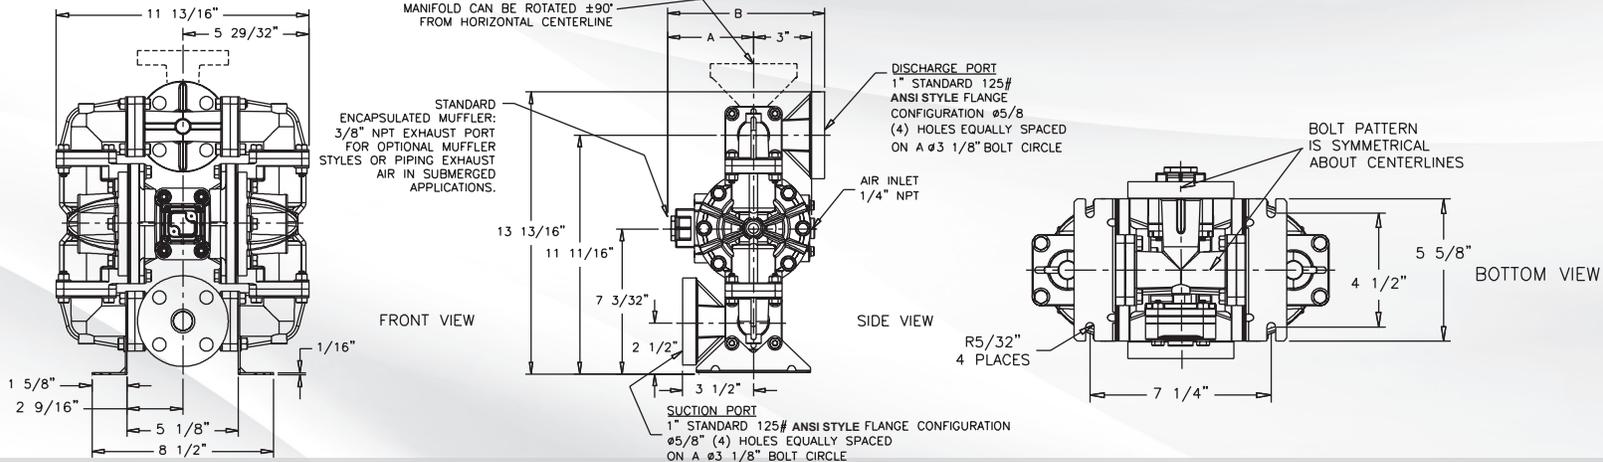

### 5 YEAR LIMITED PRODUCT WARRANTY

5 Year Guarantee for defects in material or workmanship. See [sandpiperpump.com/content/warranty-certifications](http://sandpiperpump.com/content/warranty-certifications) for complete warranty, including terms and conditions, limitations and exclusions.




### USE ONLY GENUINE SANDPIPER PARTS

All certification, standards, guarantees & warranties originally supplied with this pump will be invalidated by the use of service parts not identified as "Genuine SANDPIPER Parts."



# EXPLANATION OF PUMP NOMENCLATURE

**Your Model #: S**  
(fill in from pump nameplate)

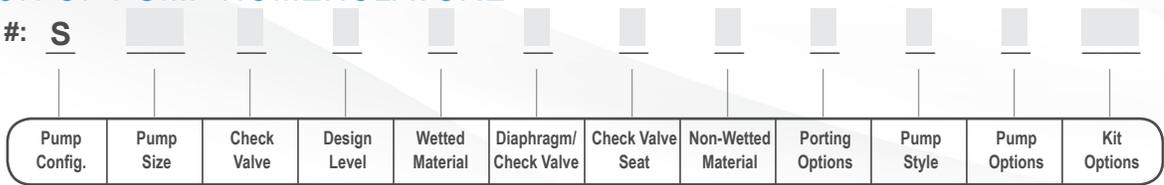

**Model #: S XX X X X X X X X X X X XX**

**PUMP BRAND**  
S= Sandpiper®

**PUMP SIZE**  
10= 1"

**CHECK VALVE TYPE**  
B= Ball

**DESIGN LEVEL**  
1= Design Level 1

**WETTED MATERIAL**  
K= PVDF  
N= Nylon  
P= Polypropylene

**DIAPHRAGM/CHECK VALVE MATERIALS**  
1= Santoprene/Santoprene  
2= Virgin PTFE-Santoprene Backup/Virgin PTFE  
7= Santoprene/Nitrile  
8= Virgin PTFE-Santoprene Backup/FKM

Z= One-Piece Bonded/PTFE

**CHECK VALVE SEAT**  
K= PVDF  
N= Nylon  
P= Polypropylene

**NON-WETTED MATERIAL OPTIONS**  
P= Polypropylene  
I= Polypropylene with PTFE Hardware

**PORTING OPTIONS**  
A= ANSI Flange

**PUMP STYLE**  
S= Standard

**PUMP OPTIONS**  
0= None  
6= Metal Muffler

**KIT OPTIONS**  
00.= None  
P0.= 10-30VDC Pulse Output Kit  
P1.= Intrinsically-Safe 5-30VDC, 110/120VAC, 220/240VAC

**Pulse Output Kit**  
P2.= 110/120 or 220/240VAC Pulse Output Kit  
E0.= Solenoid Kit w/24VDC Coil  
E1.= Solenoid Kit 24VDC Explosion-Proof Coil  
E2.= Solenoid Kit w/24VAC/12VDC Coil  
E3.= Solenoid Kit w/12VDC Explosion-Proof Coil  
E4.= Solenoid Kit w/110VAC Coil  
E5.= Solenoid Kit w/110VAC 60 Hz Explosion-Proof Coil  
E6.= Solenoid Kit w/220VAC Coil  
E7.= Solenoid Kit w/220VAC 60 Hz Explosion-Proof Coil  
E8.= Solenoid Kit w/110VAC 50 Hz Explosion-Proof Coil  
E9.= Solenoid Kit w/230VAC 50 Hz Explosion-Proof Coil  
SP= Stroke Indicator Pins

## MATERIALS

Material Profile:	Operating Temperatures:	
	Max.	Min.
<b>CAUTION!</b> Operating temperature limitations are as follows:		
<b>CONDUCTIVE ACETAL:</b> Tough, impact resistant, ductile. Good abrasion resistance and low friction surface. Generally inert, with good chemical resistance except for strong acids and oxidizing agents.	190°F 88°C	-20°F -29°C
<b>EPDM:</b> Shows very good water and chemical resistance. Has poor resistance to oils and solvents, but is fair in ketones and alcohols.	280°F 138°C	-40°F -40°C
<b>FKM (FLUOROCARBON):</b> Shows good resistance to a wide range of oils and solvents; especially all aliphatic, aromatic and halogenated hydrocarbons, acids, animal and vegetable oils. Hot water or hot aqueous solutions (over 70°F(21°C)) will attack FKM.	350°F 177°C	-40°F -40°C
<b>HYTREL®:</b> Good on acids, bases, amines and glycols at room temperatures only.	220°F 104°C	-20°F -29°C
<b>NEOPRENE:</b> All purpose. Resistance to vegetable oils. Generally not affected by moderate chemicals, fats, greases and many oils and solvents. Generally attacked by strong oxidizing acids, ketones, esters and nitro hydrocarbons and chlorinated aromatic hydrocarbons.	200°F 93°C	-10°F -23°C
<b>NITRILE:</b> General purpose, oil-resistant. Shows good solvent, oil, water and hydraulic fluid resistance. Should not be used with highly polar solvents like acetone and MEK, ozone, chlorinated hydrocarbons and nitro hydrocarbons.	190°F 88°C	-10°F -23°C
<b>NYLON:</b> 6/6 High strength and toughness over a wide temperature range. Moderate to good resistance to fuels, oils and chemicals.	180°F 82°C	32°F 0°C

<b>POLYPROPYLENE:</b> A thermoplastic polymer. Moderate tensile and flex strength. Resists strong acids and alkali. Attacked by chlorine, fuming nitric acid and other strong oxidizing agents.	180°F 82°C	32°F 0°C
<b>PVDF:</b> (Polyvinylidene Fluoride) A durable fluoroplastic with excellent chemical resistance. Excellent for UV applications. High tensile strength and impact resistance.	250°F 121°C	0°F -18°C
<b>SANTOPRENE®:</b> Injection molded thermoplastic elastomer with no fabric layer. Long mechanical flex life. Excellent abrasion resistance.	275°F 135°C	-40°F -40°C
<b>UHMW PE:</b> A thermoplastic that is highly resistant to a broad range of chemicals. Exhibits outstanding abrasion and impact resistance, along with environmental stress-cracking resistance.	180°F 82°C	-35°F -37°C
<b>URETHANE:</b> Shows good resistance to abrasives. Has poor resistance to most solvents and oils.	150°F 66°C	32°F 0°C
<b>VIRGIN PTFE:</b> (PFA/TFE) Chemically inert, virtually impervious. Very few chemicals are known to chemically react with PTFE; molten alkali metals, turbulent liquid or gaseous fluorine and a few fluoro-chemicals such as chlorine trifluoride or oxygen difluoride which readily liberate free fluorine at elevated temperatures.	220°F 104°C	-35°F -37°C
Maximum and Minimum Temperatures are the limits for which these materials can be operated. Temperatures coupled with pressure affect the longevity of diaphragm pump components. Maximum life should not be expected at the extreme limits of the temperature ranges.		
<b>Metals:</b>		
<b>ALLOY C:</b> Equal to ASTM494 CW-12M-1 specification for nickel and nickel alloy.		
<b>STAINLESS STEEL:</b> Equal to or exceeding ASTM specification A743 CF-8M for corrosion resistant iron chromium, iron chromium nickel and nickel based alloy castings for general applications. Commonly referred to as 316 Stainless Steel in the pump industry.		

For specific applications, always consult the Chemical Resistance Chart.